SPECIFICATIONS

HOPGH 6000 Hydraulic grab

Middenweg 157, 1394 AH
Nederhorst , Den Berg
The Netherlands

+31 20 74 00 527
info@dutchoffshore.com
www.dutchoffshore.com

Heavy-duty hydraulic grab

Specifications

Type :	HOPGH-6000
Execution :	Heavy Duty, designed for rock handling
Shell execution :	ESCO teeth (Hardox 450 inner blades)
Shell version :	3 open shells
Capacity (Max load) :	6 m^3
WLL (Working Load Limit) :	9 tons (for handling rocks)
SWL (Safe Working Load) :	15 tons
Empty Weight :	9,100 kg (9.1 ton)
Frame :	S355J2G3 – Dillimax 690
Cylinder Rods :	Stainless steel, hard chromed
Max. Flow :	270 l/min
Shell Material :	Hardox 450 inner blades

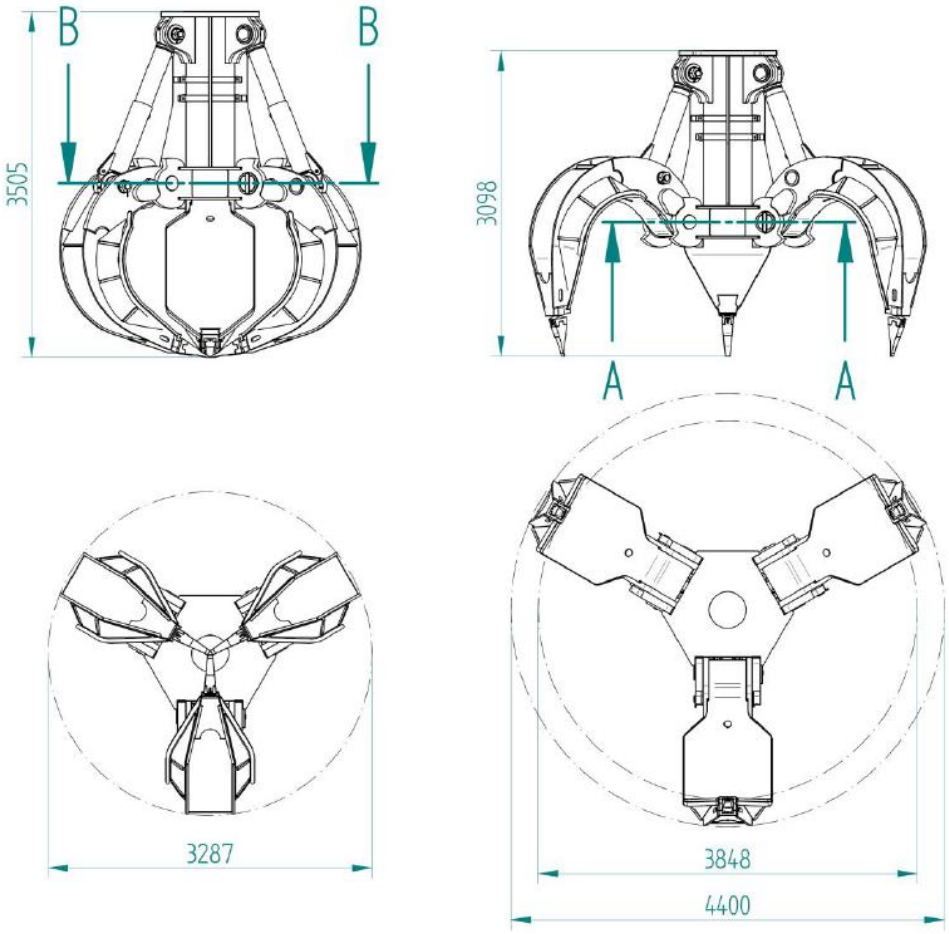
B
B
3505
3098
A
A
3287
3848
4400